


Tubeless Metal Clamp-in Valves for Truck and Bus

Recommended torque at installation: 35-55 inch-pounds / 4-6 Nm

Suitable Rim Hole .625" / 15.7 mm

No.	Part No.	ETRTO	A
1	TR500	V3.21.3	51
2	TR501	V3.21.2	38
3	TR570	V3.21.4	80
4	TR571	V3.21.5	86
5	TR572	V3.21.6	95
6	TR573	V3.21.7	111
7	TR574	V3.21.8	127
8	TR575	V3.21.1	29
9	TR500-23	-	26
10	TR570C	V3.21.9	33
11	TR571C	V3.21.10	33
12	TR572C	V3.21.11	33
13	TR572-12	-	41
14	TR573C	V3.21.12	33
15	TR573-25	-	57




European Style O-Ring Seal Clamp-in Brass Valves

For wheels with wide base rims 15° tapered

Recommended torque at installation: 12-15 Nm / 105-130 inch-pounds



Straight Type

No.	Part No.	C
1	V3.20.1	36
2	V3.20.3	82
3	90MS9.7	85



Single Bend Type

No.	Part No.	A	B	X°
1	V3.20.2	30	60	17.5
2	V3.20.4	25	60	27
3	V3.20.5	25	40	27
4	110MS9.7-27	25	80	27
5	V3.20.6	25	85	27
6	115MS9.7-35	25	85	35
6	V3.20.7	25	50	27
7	V3.20.8	29	85	12
8	V3.20.10	50	25	27
9	V3.20.12	25	70	27

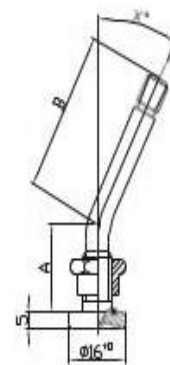

Double Bend Type

No.	Part No.	A	B	C	X°	Y°
1	V3.20.11	25	45	25	27	42
2	133MS	41	22	65	27	13

** Various length and bend angles other than above specifications available upon request **